

Rocker Panel Moulding




Removal

NOTE: Removal steps in this procedure may contain installation details.

NOTE: LH side shown, RH side similar.


1. Remove the 3 pushpin type retainers and partially position aside the splash shield.

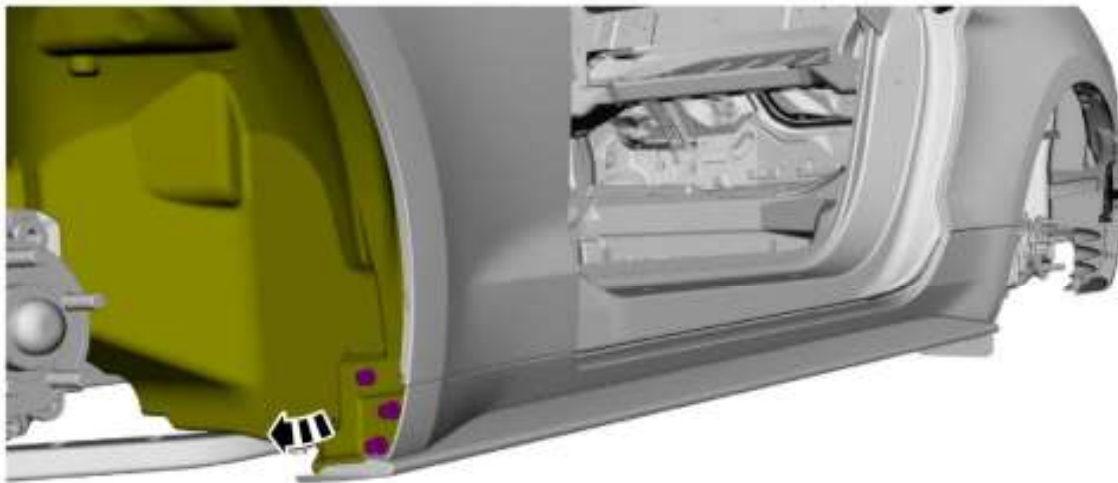


E1B4327



2. Remove the pushpin type retainers from the underside of the rocker panel moulding.

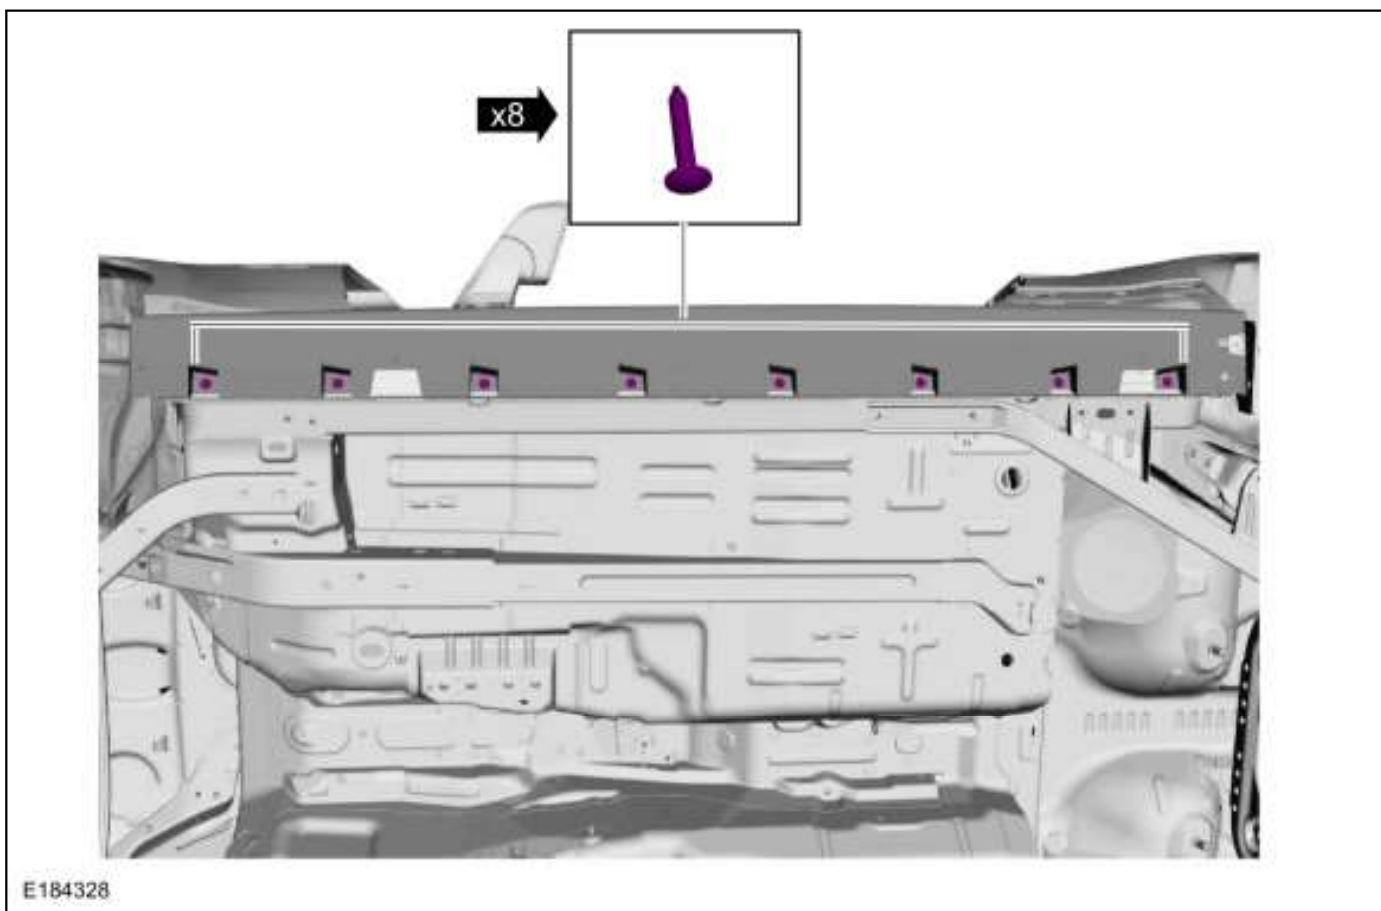

1. Starting at the rear of the rocker panel moulding, detach the retainers from the rocker panel.
2. Disengage the four tab retainers at the fender.

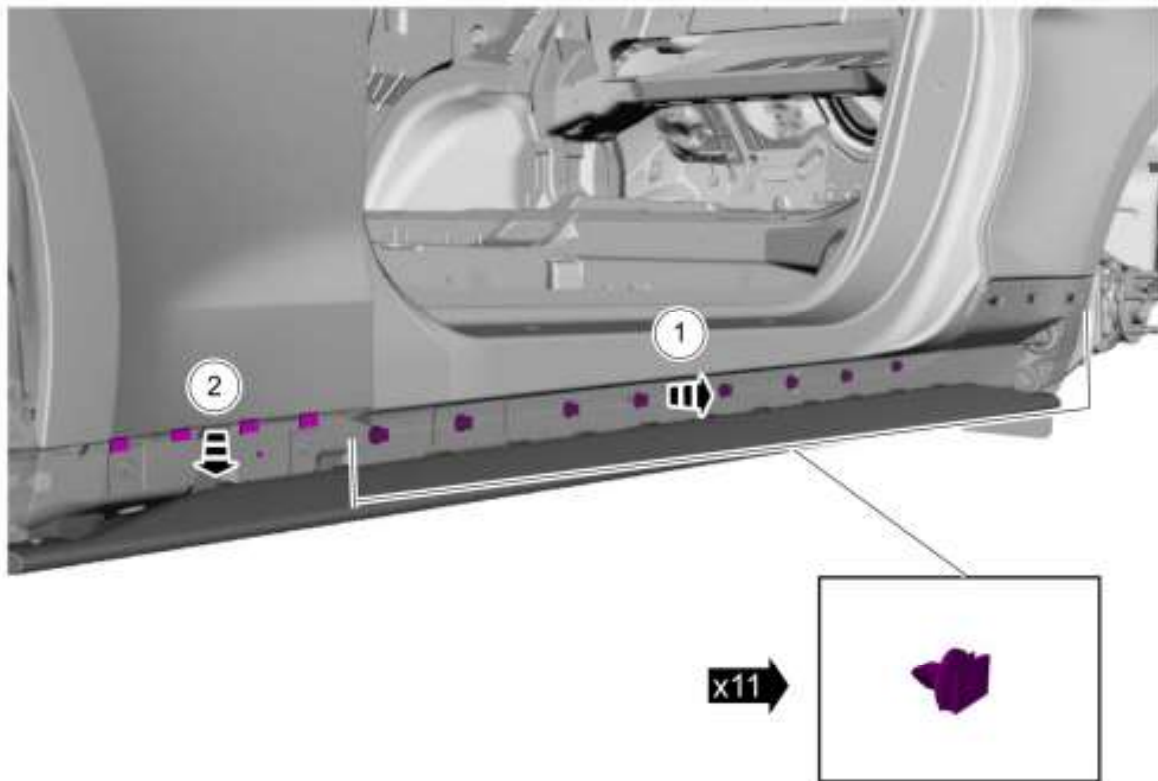

E184329



4. Remove the rocker panel moulding.



E184330



Installation

1. To install, reverse the removal procedure.

© Copyright 2020, Ford Motor Company.
