

A-Pillar Trim Panel - Coupe



Removal

NOTE: LHD shown, RHD similar.


NOTE: RH side shown, LH side similar.

1. Remove the pin-type retainer and position aside the door weatherstrip.



2. Remove the A-pillar trim panel.
 1. Release the clips and disconnect the tether anchor.
 2. If equipped

- Disconnect the speaker electrical connector
3. Release the clips and remove the A-pillar trim panel.

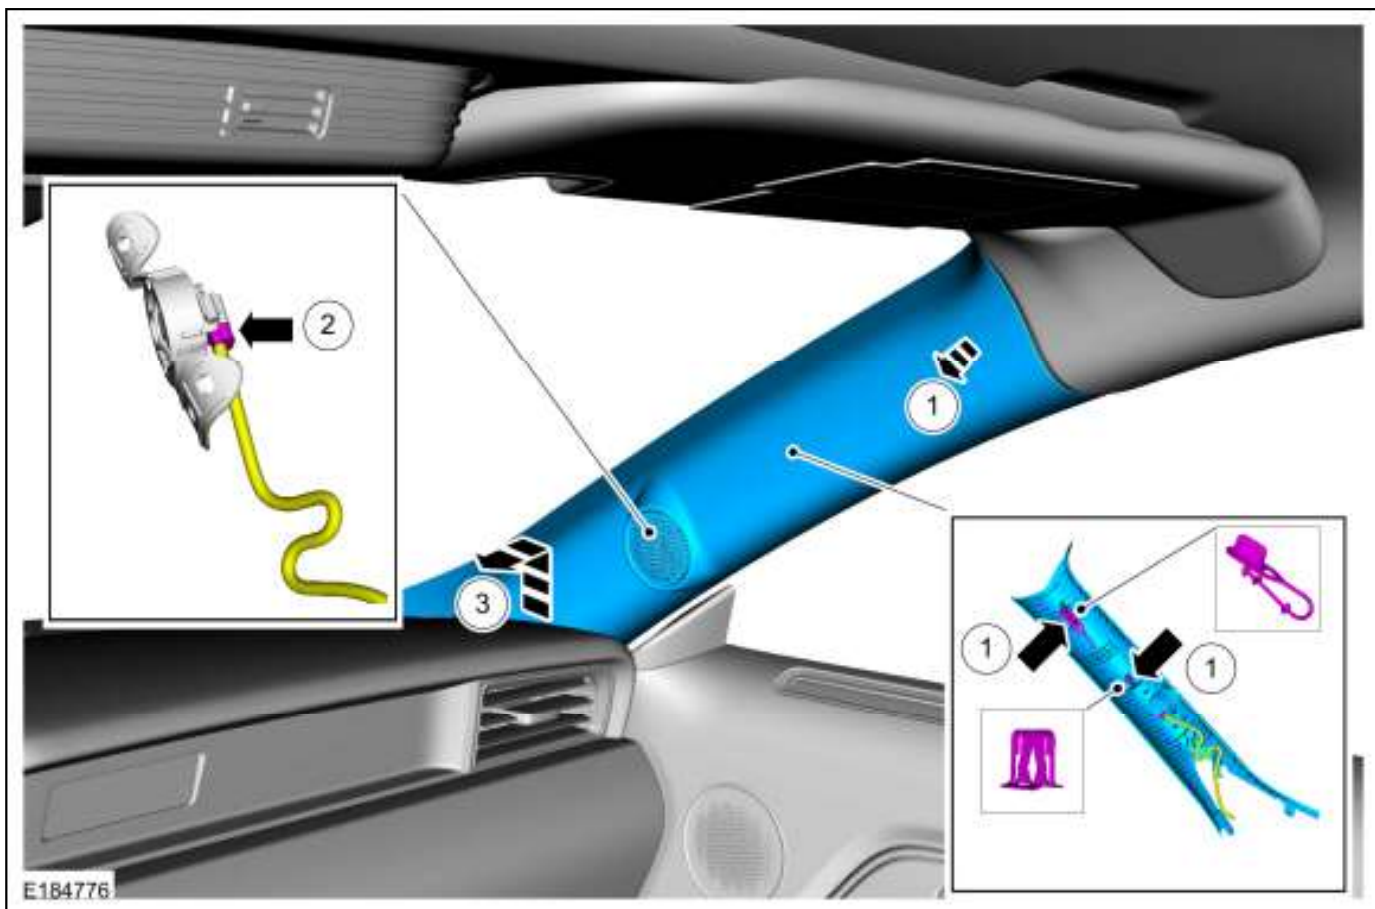

Installation

1. To install, reverse the removal procedure.