

WHEEL MEASURING INFORMATION & TERMINOLOGY

The following information can be used to gather measurements to ensure a proper fit for most applications.

LUG NUT TORQUE SPECIFICATIONS

Stud Size Torque Rating


7/16"	70-80 ft.lbs.
1/2"	75-85 ft.lbs.
9/16"	100-115 ft.lbs.
5/8"	125-135 ft.lbs.

Stud Size Torque Rating

10mm	45-55 ft.lbs.
12mm	75-85 ft.lbs.
14mm	85-95 ft.lbs.
16mm	125-150 ft.lbs.


MEASURING LUG PATTERN

5 LUG




From back side of the top stud to the center of the second stud.

6 LUG




From center of the top stud to center of the second stud directly across.


8 LUG



MEASURING BRAKES / CALIPERS

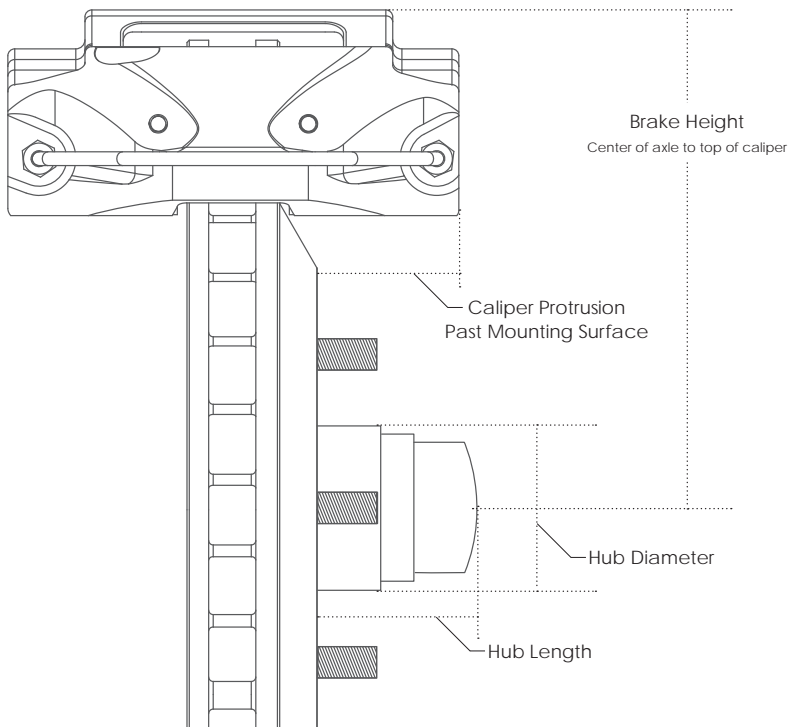

MEASURING A RIM

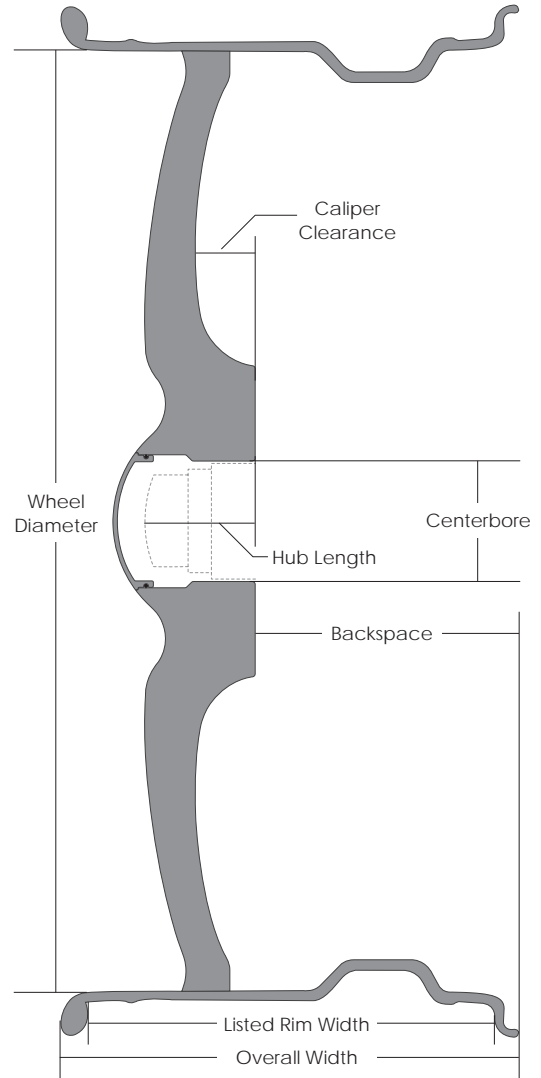

TECH INFO

Caliper Clearance - The amount of space available for a brake caliper, measured from the mounting surface to the backside of the wheel center.

Backspace - Measured from the mounting surface of the wheel to the back edge of the rim.

Centerbore - The machined opening in the center of the wheel that allows the hub to pass through.

Listed Rim Width - Measured from beadseat to beadseat.

Overall Width - Measured from outside edge to outside edge of a rim and is 1" larger than the *Listed Rim Width*.

Example: 17x8 (listed) will have an overall width of 9".