


Connector:	Description	Color	Harness	Base Part #	Service Pigtail
C2470	AUDIO AMPLIFIER	BK	14401	part# N/A	Not Available

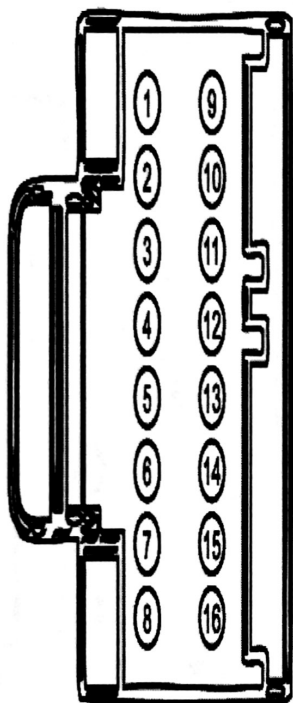

Pin	Circuit	Gauge	Circuit Function	Qualifier
1	RME61 (BU)	26	CTRL MOD. - AUDIO # RADIO RIGHT REAR -	
2	VME61 (VT-WH)	26	CTRL MOD. - AUDIO # RADIO RIGHT REAR +	
3	RME18 (YE)	26	CTRL MOD. - AUDIO # RADIO RIGHT -	
4	VME18 (VT)	26	CTRL MOD. - AUDIO # RADIO RIGHT +	
5	RME60 (BN)	26	CTRL MOD. - AUDIO # RADIO LEFT REAR -	
6	VME60 (GN-WH)	26	CTRL MOD. - AUDIO # RADIO LEFT REAR +	
7	RME17 (GY)	26	CTRL MOD. - AUDIO # RADIO LEFT -	
8	VME17 (GN)	26	CTRL MOD. - AUDIO # RADIO LEFT +	
9	VMEA5 (BU-WH)	26	CTRL MOD. - ACTIVE NOISE CANCELLATION # OUTPUT RIGHT FRONT POS (+) (ANC2)	
10	VMEA6 (YE-BU)	26	CTRL MOD. - ACTIVE NOISE CANCELLATION # OUTPUT RIGHT FRONT NEG (-) (ANC2)	
11	VMEA3 (GN)	26	CTRL MOD. - ACTIVE NOISE CANCELLATION # OUTPUT LEFT FRONT POS (+) (ANC1)	
12	VMEA4 (YE)	26	CTRL MOD. - ACTIVE NOISE CANCELLATION # OUTPUT LEFT FRONT NEG (-) (ANC1)	
13	VMEA7 (GY)	26	CTRL MOD. - ACTIVE NOISE CANCELLATION # OUTPUT REAR POS (+) (ANC3)	
14	VMEA8 (GN-WH)	26	CTRL MOD. - ACTIVE NOISE CANCELLATION # OUTPUT REAR NEG (-) (ANC3)	
15	VDB29 (GN)	26	CONNECTOR - DIAGNOSTIC # CAN BUS HIGH SPEED 3 (LOWER) HIGH	
16	VDB30 (WH)	26	CONNECTOR - DIAGNOSTIC # CAN BUS HIGH SPEED 3 (LOWER) LOW	

Check for Terminal Part Numbers